

Portate SIF al ritorno**

Portate in l/min. rilevate con
Dp=0.4 - 0.5 bar

SIF Flow rates on return line**

Flow rate in l/min. measured with
Dp=0.4 - 0.5 bar

Filtredurchfluß SIF im Rücklauf**

Filterdurchfluß in l/min. gemessen
bei Dp=0.4 - 0.5 bar

Débits SIF au retour**

Débits en l/min. mesurés avec
Dp=0.4 - 0.5 bar

Caudales SIF retorno**

Débits en l/min. mesurés avec
Dp=0.4 - 0.5 bar

ELEMENTO FILTRANTE FILTERING ELEMENTS	MICROFIBRA FIBERGLASS		CARTA PAPER				TELA METALLICA WIRE MESH	
Mod.	10A 10 MICRON ABS	25A 25 MICRON ABS	10C 10 MICRON NOM	30C 30 MICRON NOM	10 10 MICRON NOM	30 30 MICRON NOM	60 60 MICRON NOM	90 90 MICRON NOM
SIF.10A	25	32	40	45	40	45	55	60
SIF.10B	45	65	65	70	65	70	80	85
SIF.15B	50	60	73	78	73	78	90	95
SIF.15C	65	75	90	95	90	95	105	110
SIF.15L	90	100	115	120	115	120	125	135
SIF.20C	70	80	95	100	95	100	110	115
SIF.20L	95	105	120	125	120	125	130	140
SIF.20D	170	180	195	200	195	200	220	230
SIF.25D	205	215	230	240	230	240	260	270
SIF.25E	230	240	255	265	255	265	285	295
SIF.30E	245	255	270	280	270	280	310	320
SIF.30F	295	305	320	330	320	330	360	370
SIF.30G	315	325	340	350	340	350	380	390
SIF.35H	430	450	480	500	480	500	550	570

** Portate rilevate con olio avente viscosità cinematica 30 cst e densità 0,86 kg/dm³.



** Flow rates measured with oil of 30 cst kinematic viscosity and 0,86 kg/dm³ density.

- Compatibilità con fluidi: oli minerali (HH-HL-HM-HR-HV-HG) e fluidi sintetici (HS-HFDR-HFUD-HFDS).
- Fluid compatibility: mineral oil (HH-HL-HM-HR-HV-HG) and synthetic fluids (HS-HFDR-HFUD-HFDS).©

- Grafici curve Δp VS portata disponibili su richiesta
- Graphic curves Δp VS flow rate available upon request

INDICATORI INTASAMENTO

CLOGGING INDICATORS - VERSCHMUTZUNGSANZEIGEN - INDICATEURS DE COLMAGE - INDICADORES DE SUCIEDAD

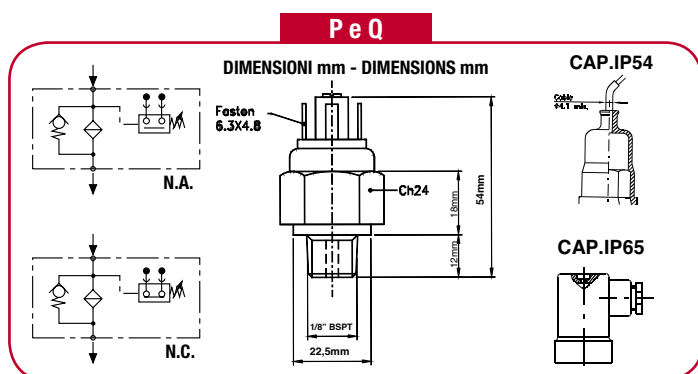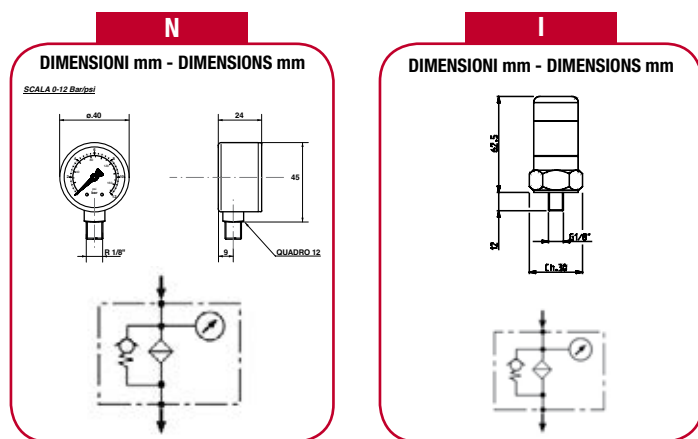

SERIE SERIES	TARATURA SETTING	TIPO - TYPE
N	0 ÷ 12 bar	Manometro (Attacco radiale) Pressure gauge (Radial connection) Manometer (Radiale Verbindung) Manomètre (Connexion radiale) Manometro (Conexión radial)
I	1,5 bar	Pressostato visivo Visual pressure indicator Optisch Differenzdruckanzeige Pressostat visuel Presostato visual
P	1,5 bar	Pressostato N.A. (Max 240V/0,4A) / (48V/0,5A) Pressure switch N.O. (Max 240V/0,4A) / (48V/0,5A) Druckschalter N.O. (Max 240V/0,4A) / (48V/0,5A) Pressostat N.O. (Max 240V/0,4A) / (48V/0,5A) Presostato N.A. (Max 240V/0,4A) / (48V/0,5A)
Q	1,5 bar	Pressostato N.C. (Max 240V/0,4A) / (48V/0,5A) Pressure switch N.C. (Max 240V/0,4A) / (48V/0,5A) Druckschalter N.C. (Max 240V/0,4A) / (48V/0,5A) Pressostat N.F. (Max 240V/0,4A) / (48V/0,5A) Presostato N.C. (Max 240V/0,4A) / (48V/0,5A)