

Portate FSI al ritorno**

Portate in l/min. rilevate con Dp=0.4 - 0.5 bar

FSI Flow rates on return line**

Flow rate in l/min. measured with Dp=0.4 - 0.5 bar

Filtredurchfluß FSI im Rücklauf**

Filterdurchfluß in l/min. gemessen bei Dp=0.4 - 0.5 bar

Débits FSI au retour**

Débits en l/min. mesurés avec Dp=0.4 - 0.5 bar

Caudales FSI retorno**

Débits en l/min. mesurés avec Dp=0.4 - 0.5 bar

ELEMENTO FILTRANTE FILTERING ELEMENT	MICROFIBRA / FIBERGLASS				CARTA / PAPER		TELA METALLICA WIRE MESH			
	Mod.	FILETTO THREAD BSPP	A05 5 MICRON ABS	A10 10 MICRON ABS	A25 25 MICRON ABS	C10 10 MICRON NOM	C25 25 MICRON NOM	M25 25 MICRON NOM	M60 60 MICRON NOM	M90 90 MICRON NOM
FSI1	1/2"	30	30	35	30	35	35	35	35	35
	3/4"	35	40	50	45	55	55	60	60	60
FSI2	3/4"	35	45	55	55	75	65	85	90	90
	1"	35	45	55	55	85	65	85	95	95
	1 1/4"	35	45	55	55	85	65	90	100	100
FSI3	3/4"	55	65	75	75	95	75	90	95	95
	1"	55	65	75	75	100	85	100	105	105
	1 1/4"	55	65	80	75	105	85	105	110	110
FSI4	3/4"	95	100	115	115	130	115	125	130	130
	1"	105	120	135	135	155	135	155	160	160
	1 1/4"	110	125	145	145	175	145	170	180	180

** Portate rilevate con olio avente viscosità cinematica 30 cst e densità 0,86 kg/dm3.



** Flow rates measured with oil of 30 cst kinematic viscosity and 0,86 kg/dm3 density.

- Compatibilità con fluidi: oli minerali (HH-HL-HM-HR-HV-HG) e fluidi sintetici (HS-HFDR-HFDU-HFDS).
- Fluid compatibility: mineral oil (HH-HL-HM-HR-HV-HG) and synthetic fluids (HS-HFDR-HFDU-HFDS).

- Grafici curve Δp VS portata disponibili su richiesta
- Graphic curves Δp VS flow rate available upon request

INDICATORI INTASAMENTO

CLOGGING INDICATORS - VERSCHMUTZUNGSANZEIGEN - INDICATEURS DE COLMAGE - INDICADORES DE SUCIEDAD

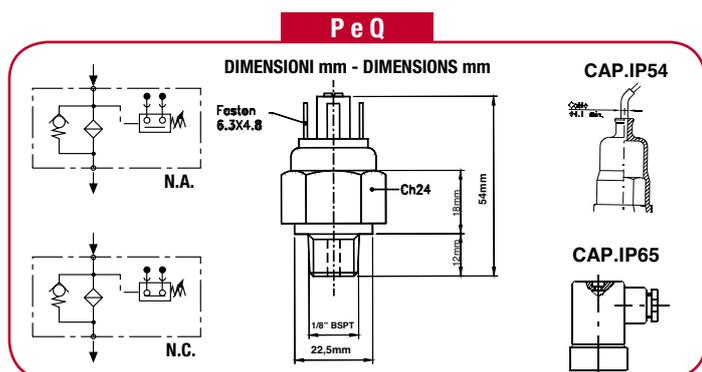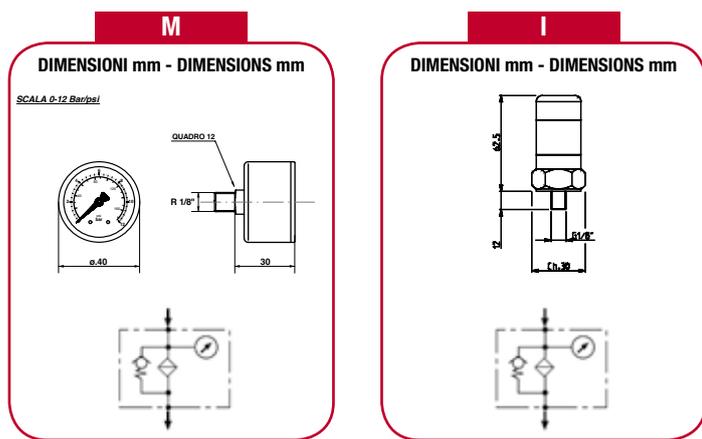

SERIE SERIES	TARATURA SETTING	TIPO - TYPE
M	0÷ 12 bar	Manometro Pressure gauge Manometer Manomètre Manometro
I	1,5 bar	Pressostato visivo Visual pressure indicator Optisch Differenzdruckanzeige Pressostat visuel Presostato visual
P	1,5 bar	Pressostato N.A. (Max 240V/0,4A) / (48V/0,5A) Pressure switch N.O. (Max 240V/0,4A) / (48V/0,5A) Druckschalter N.O. (Max 240V/0,4A) / (48V/0,5A) Pressostat N.O. (Max 240V/0,4A) / (48V/0,5A) Presostato N.A. (Max 240V/0,4A) / (48V/0,5A)
Q	1,5 bar	Pressostato N.C. (Max 240V/0,4A) / (48V/0,5A) Pressure switch N.C. (Max 240V/0,4A) / (48V/0,5A) Druckschalter N.C. (Max 240V/0,4A) / (48V/0,5A) Pressostat N.F. (Max 240V/0,4A) / (48V/0,5A) Presostato N.C. (Max 240V/0,4A) / (48V/0,5A)