


CILINDRI TELESCOPICI CON 2 SFILATE
TELESCOPIC CYLINDERS WITH 2 EXTENSIONS


VÉRINS TELESCOPIQUES A 2 EXPANSIONS
TELESKOPZYLINDER MIT 2 STUFEN

TYPE F :
FORO
TROU
HOLE
LOCH

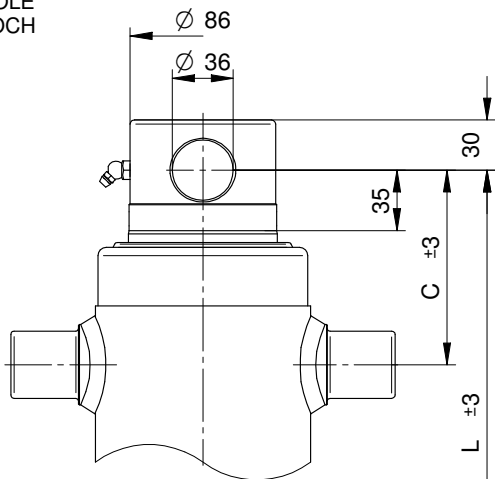


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Page 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7

TYPE S :
SFERA
ROTULE
BALL
KUGEL

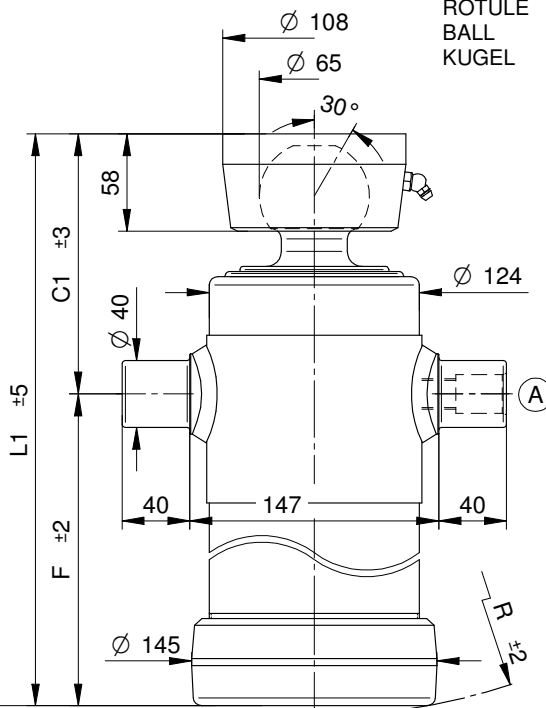


KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ: **SGS088-107**

STANDARD




(A) 07000000 1/2 gas


OPTIONAL




CULLA 3



SUP040



SUP040-A



71720000 3/8 gas
71730000 1/2 gas



CH065-2782

PESO TOT. RIBALTABILE 13 Ton. a 180 Bar

TOTAL WEIGHT TIP-UP 13 Ton. 180 Bar

POIDS TOT. BASCULABLE 13 Ton. à 180 Bar

GESAMTGEWICHT ANHÄNGER 13 Ton. 180 Bar

TIPO TYPE TYPE TYPE	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm										DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt l + t
			68 TON. 6,5	88 TON. 10,9	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	187 TON. 49,4	210 TON. 62,3	236 TON. 78,5	C	C¹	F	L	L¹	R	F		S		
4023	3369	695		●	●							115	155	365	480	520	373	420	30,5	33	5,3	
4026	3372	895		●	●							115	155	465	580	620	472	520	36,5	39	6,8	
4027	3373	1095		●	●							145	185	535	680	720	570	620	42,5	45	8,3	
4028	8130	1195		●	●							145	185	615	760	800	650	700	47,5	50	10	
4029	7340	1395		●	●							145	185	715	860	900	750	800	53,5	56	11,6	

PRESSIONE MAX. DI ESERCIZIO 220 BAR - PRESSION MAX. DE SERVICE 220 BAR
WORKING MAX. PRESSURE 220 BAR - MAX. BETRIEBSDRUCK 220 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN