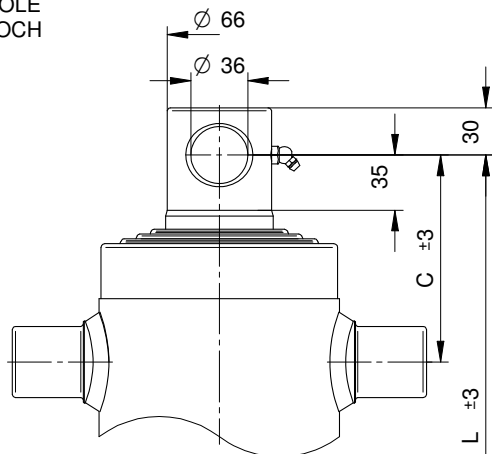
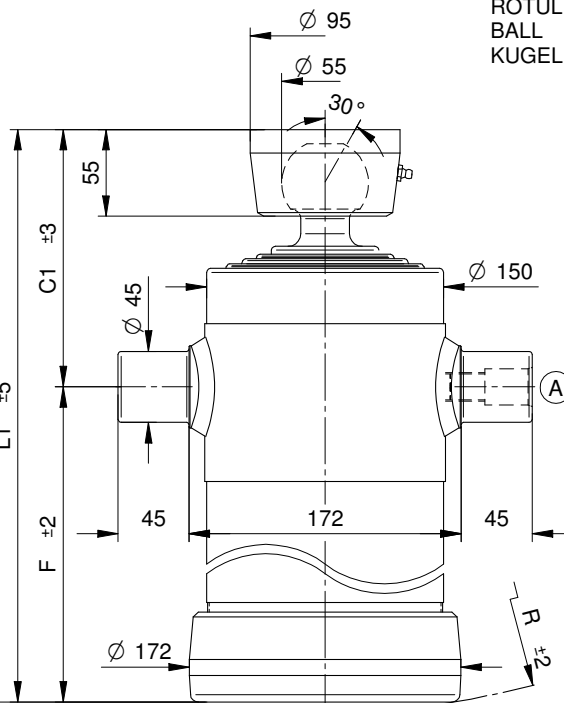




CILINDRI TELESCOPICI CON 4 SFILATE
TELESCOPIC CYLINDERS WITH 4 EXTENSIONS
VÉRINS TELESCOPIQUES AVEC 4 EXPANSIONS
TELESKOPZYLINDER MIT 4 STUFEN
TYPE F :
FORO
TROU
HOLE
LOCH


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Pag. 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7

KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ : SGS068-126
TYPE S :
SFERA
ROTULE
BALL
KUGEL

STANDARD


(A) 07000000 1/2 gas


OPTIONAL


CULLA 4 + SUP050




SUP045

SUP045-A



71720000 3/8 gas

71730000 1/2 gas



CH055-2957

PESO TOT. RIBALTABILE 14 Ton. a 180 Bar
POIDS TOT. BASCULABLE 14 Ton. à 180 Bar
TOTAL WEIGHT TIP-UP 14 Ton. 180 Bar
GESAMTGEWICHT ANHÄNGER 14 Ton. 180 Bar

TIPO TYPE TYPE TYPE	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSA – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm									DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt l + t
			68 TON. 6,5	88 TON. 10,9	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	187 TON. 49,4	210 TON. 62,3	236 TON. 78,5	C	C¹	F	L	L¹	R		F	S	
				*15																	
4040	3432	1980	●	●	●	●						130	162	515	645	677	523	570	75,5	77	15,6
4041	3382	1040	●	●	●	●						130	162	278	408	440	295	335	48	49,5	8,3
4042	3383	1220	●	●	●	●						130	162	325	455	487	340	380	53,5	55	9,7
4043	3384	1500	●	●	●	●						130	162	395	525	557	405	450	61,5	63	12
4044	3385	1700	●	●	●	●						130	162	445	575	607	455	500	67,5	69	13,5

PRESSIONE MAX. DI ESERCIZIO 220 BAR - PRESSION MAX. DE SERVICE 220 BAR
WORKING MAX. PRESSURE 220 BAR - MAX. BETRIEBSDRUCK 220 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE.
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN