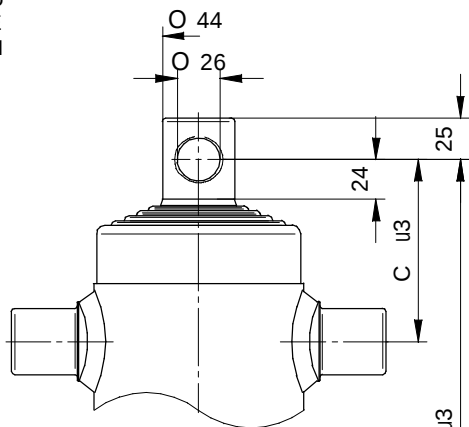
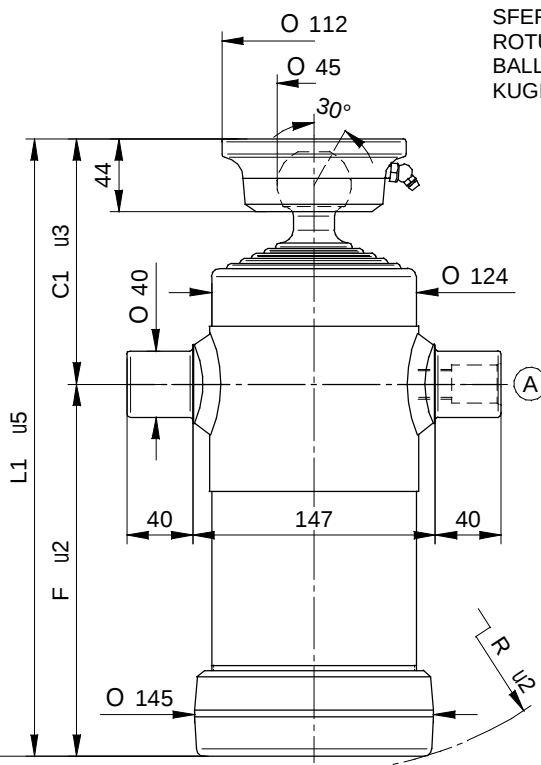






CILINDRI TELESCOPICI CON 5 SFILATE
TELESCOPIC CYLINDERS WITH 5 EXTENSIONS
VÉRINS TELESCOPIQUES AVEC 5 EXPANSIONS
TELESKOPZYLINDER MIT 5 STUFEN
TYPE F :
FORO
TROU
HOLE
LOCH


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Pag. 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE' ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMASSNAHMEN FÜR DEN EINBAU, Page 7

TYPE S :
SFERA
ROTULE
BALL
KUGEL

KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ : **SGS046-107**
STANDARD

OPTIONAL

PESO TOT. RIBALTABILE 8 Ton. a 180 Bar
POIDS TOT. BASCULABLE 8 Ton. à 180 Bar
TOTAL WEIGHT TIP-UP 8 Ton. 180 Bar
GESAMTGEWICHT ANHÄNGER 8 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm									DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt l.t
			46 TON. 2,9	61 TON. 5,2	76 TON. 8,1	91 TON. 11,7	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	187 TON. 49,4	C	C¹	F	L	L¹	R		F	S	
*Senza raschiatori																					
3090*	7480	500	●	●	●	●	●					100	140	95	195	235	125	150	17	18,5	2,5
3050	3361	690	●	●	●	●	●					110	150	155	265	305	172	210	22	23,5	3,5
3091	8585	840	●	●	●	●	●					110	150	185	295	335	200	240	23,5	25	4,5
3092	8590	1040	●	●	●	●	●					110	150	225	335	375	237	280	27,5	29	5
3093	8120	1190	●	●	●	●	●					110	150	255	365	405	265	310	29,5	31	6
3094	8695	1490	●	●	●	●	●					110	150	315	425	465	325	370	33,5	35	7,5
3095	9780	2140	●	●	●	●	●					110	150	445	555	595	450	500	43,5	45	10,8
3096	9785	2490	●	●	●	●	●					110	150	515	625	665	520	570	49	50,5	12,4
3097	8690	1315	●	●	●	●	●					110	150	280	390	430	290	335	30,5	32	7
3098	10750	765	●	●	●	●	●					110	150	170	280	320	185	225	23	24,5	3,9
3099	13685	1855	●	●	●	●	●					110	150	395	505	545	402	450	39	40,5	9,5

PRESSIONE MAX. DI ESERCIZIO 200 BAR - PRESSION MAX. DE SERVICE 200 BAR
WORKING MAX. PRESSURE 200 BAR - MAX. BETRIEBSDRUCK 200 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN