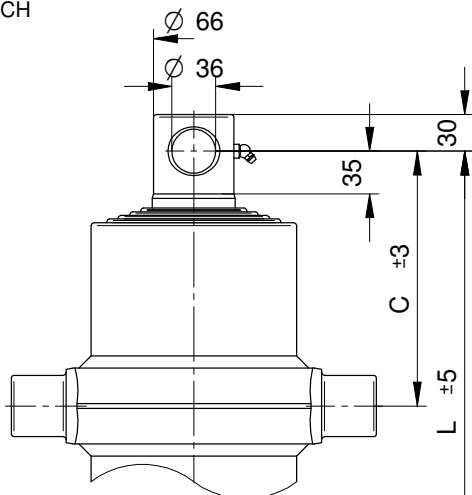
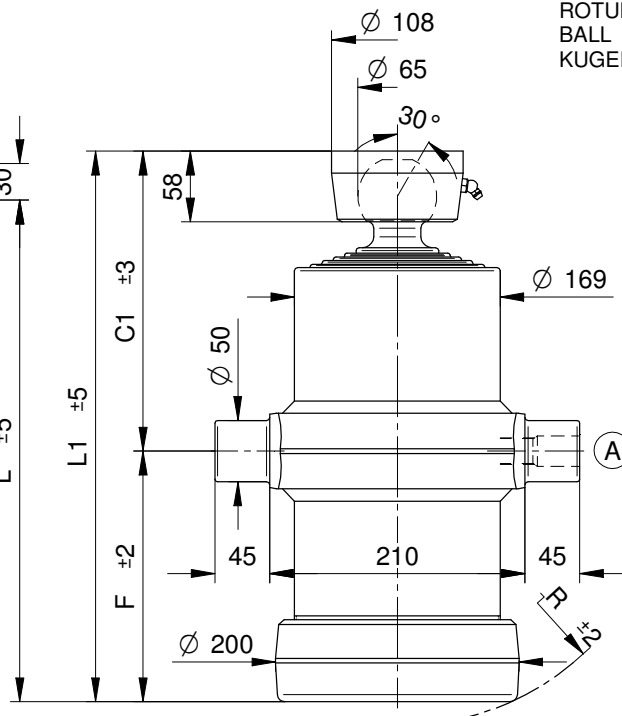




CILINDRI TELESCOPICI CON 5 SFILATE
TELESCOPIC CYLINDERS WITH 5 EXTENSIONS
VÉRINS TELESCOPIQUES AVEC 5 EXPANSIONS
TELESKOPZYLINDER MIT 5 STUFEN
TYPE F :
FORO
TROU
HOLE
LOCH


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Page 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7



KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ: SGS068-145
TYPE S :
SFERA
ROTULE
BALL
KUGEL

STANDARD



(A) 26100000 3/4 gas

OPTIONAL


SUP050 SUP050-A



26320000 27230000


71780000 1/2 Gas
71560000 3/4 Gas


CH065-2782

PESO TOT. RIBALTABILE 16 Ton. a 180 Bar
POIDS TOT. BASCULABLE 16 Ton. à 180 Bar
TOTAL WEIGHT TIP-UP 16 Ton. 180 Bar
GESAMTGEWICHT ANHÄNGER 16 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm									DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölnhalt lt
			68 TON. 6,5	88 TON. 10,9	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	187 TON. 49,4	210 TON. 62,3	236 TON. 78,5	C	C¹	F	L	L¹	R		F	S	
				*15																	
5000	9835	1295	●	●	●	●	●					208	245	205	413	450	230	335	63	65,5	12,7
5001	9840	1520	●	●	●	●	●					208	245	250	458	495	270	380	70	72,5	14,8
4050	3393	1870	●	●	●	●	●					208	245	320	528	565	335	450	79	81,5	18,2
4051	3394	2105	●	●	●	●	●					208	245	370	578	615	385	500	86	88,5	20,6
5002	9755	2455	●	●	●	●	●					208	245	440	648	685	450	570	95	97,5	24
5015	14445	2990	●	●	●	●	●					208	245	570	778	815	580	700	114	116,5	29

PRESSIONE MAX. DI ESERCIZIO 220 BAR - PRESSION MAX. DE SERVICE 220 BAR
WORKING MAX. PRESSURE 220 BAR - MAX. BETRIEBSDRUCK 220 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN