


CILINDRI TELESCOPICI CON 5 SFILATE
TELESCOPIC CYLINDERS WITH 5 EXTENSIONS


VÉRINS TELESCOPIQUES AVEC 5 EXPANSIONS
TELESKOPZYLINDER MIT 5 STUFEN

TYPE F :
FORO
TROU
HOLE
LOCH

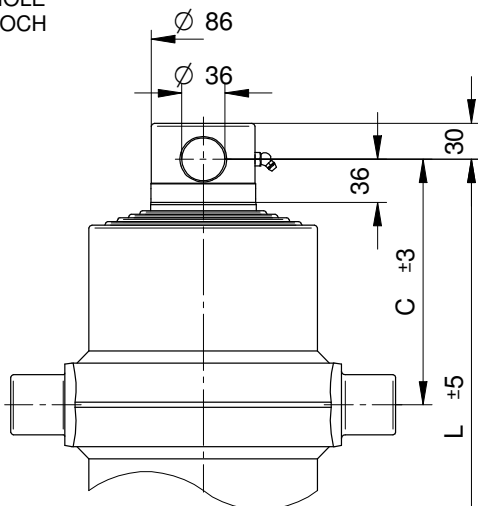


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Pag. 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE' ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7

TYPE S :
SFERA
ROTULE
BALL
KUGEL

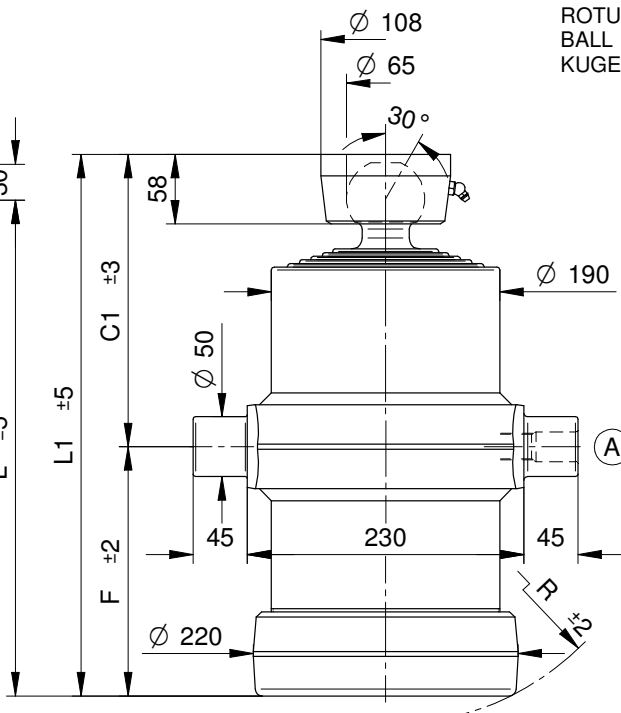


KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ : **SGS088-165**

STANDARD




(A) 26100000 3/4 gas

OPTIONAL



CULLA6




SUP050



SUP050-A



26320000 27230000



71780000 1/2 Gas
71560000 3/4 Gas



CH065-2782

PESO TOT. RIBALTABILE 22 Ton. a 180 Bar

TOTAL WEIGHT TIP-UP 22 Ton. 180 Bar

POIDS TOT. BASCULABLE 22 Ton. à 180 Bar

GESAMTGEWICHT ANHÄNGER 22 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm										DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt l
			68 TON. 6,5	88 TON. 10,9	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	187 TON. 49,4	210 TON. 62,3	236 TON. 78,5	C	C¹	F	L	L¹	R	F		S		
5005	9845	1275		●	●	●	●	●				205	245	208	413	453	235	335	75	78	17,5	
5006	9850	1500		●	●	●	●	●				205	245	253	458	498	275	380	82	85	20,3	
5007	9855	1850		●	●	●	●	●				205	245	323	528	568	340	450	91	94	25	
4052	3395	2060		●	●	●	●	●				205	245	373	578	618	390	500	97	100	28,2	
4053	3396	2410		●	●	●	●	●				205	245	443	648	688	460	570	106	109	32,8	
5010	9954	3490		●	●	●	●	●				205	245	673	878	918	680	800	136	139	46	
5011	9955	2990		●	●	●	●	●				205	245	573	778	818	580	700	123	126	40	
5012	9956	2740		●	●	●	●	●				205	245	523	728	768	530	650	110	113	37	

PRESSIONE MAX. DI ESERCIZIO 220 BAR - PRESSION MAX. DE SERVICE 220 BAR
WORKING MAX. PRESSURE 220 BAR - MAX. BETRIEBSDRUCK 220 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN