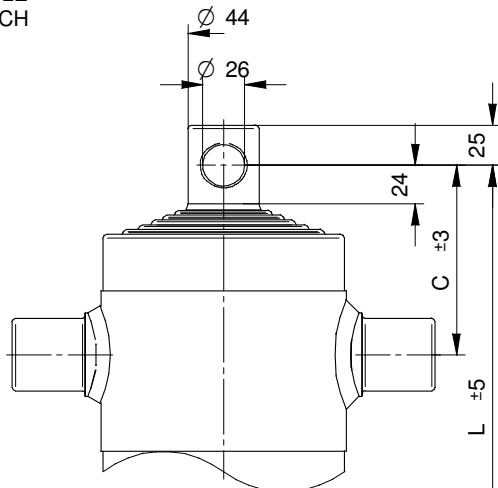
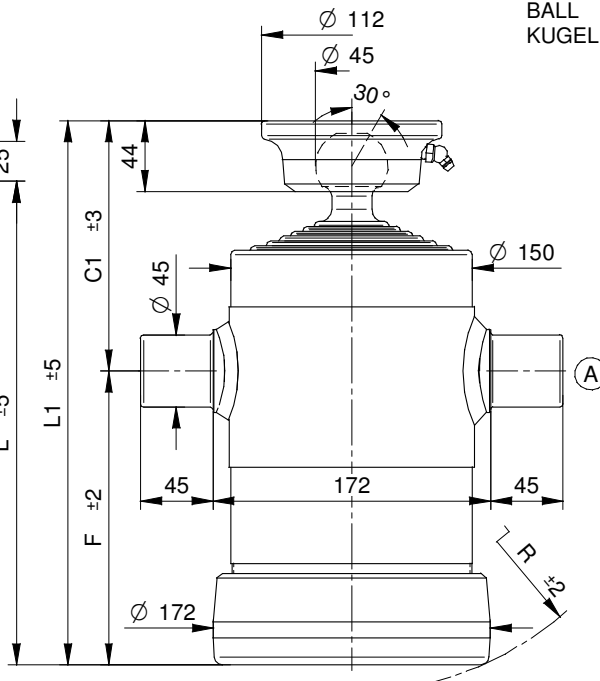



CILINDRI TELESCOPICI CON 6 SFILATE
TELESCOPIC CYLINDERS WITH 6 EXTENSIONS


VÉRINS TELESCOPIQUES AVEC 6 EXPANSIONS
TELESKOPZYLINDER MIT 6 STUFEN

TYPE F :
FORO
TROU
HOLE
LOCH


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Pag. 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE' ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7

TYPE S :
SFERA
ROTULE
BALL
KUGEL

KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ : SGS046-126
STANDARD


(A) 07000000 1/2 gas



OPTIONAL


CULLA 4 + SUP050



SUP045

SUP045-A


71720000 3/8 gas
71730000 1/2 gas


CH045-2414

PESO TOT. RIBALTABILE 9 Ton. a 180 Bar
POIDS TOT. BASCULABLE 9 Ton. à 180 Bar
TOTAL WEIGHT TIP-UP 9 Ton. 180 Bar
GESAMTGEWICHT ANHÄNGER 9 Ton. 180 Bar

TIPO TYPE TYPE TYPE	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm									DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt Lt.
			32 TON. 1,1	46 TON. 2,9	61 TON. 5,2	76 TON. 8,1	91 TON. 11,7	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	C	C¹	F	L	L¹	R		F	S	
6005	5630	690		●	●	●	●	●	●			108	145	123	231	268	155	170	27	28,5	4,3
6006	8595	1000		●	●	●	●	●	●			118	155	183	301	338	205	240	34,5	36	6,5
6007	8600	1180		●	●	●	●	●	●			118	155	213	331	368	235	270	38	39,5	7,1
6008	9790	1480		●	●	●	●	●	●			118	155	263	381	418	280	320	44	45,5	8,9
6009	9795	1780		●	●	●	●	●	●			118	155	313	431	468	330	370	49,5	51	11,2
6010	9796	2257		●	●	●	●	●	●			118	155	393	511	548	405	450	54,5	56	12
6011	9797	2557		●	●	●	●	●	●			118	155	443	561	598	455	500	60	61,5	16
6012	9798	2977		●	●	●	●	●	●			118	155	513	631	668	525	570	68	69,5	19

PRESSIONE MAX. DI ESERCIZIO 200 BAR - PRESSION MAX. DE SERVICE 200 BAR
WORKING MAX. PRESSURE 200 BAR - MAX. BETRIEBSDRUCK 200 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN