


CILINDRI TELESCOPICI CON 7 SFILATE
TELESCOPIC CYLINDERS WITH 7 EXTENSIONS


VÉRINS TELESCOPIQUES AVEC 7 EXPANSIONS
TELESKOPZYLINDER MIT 7 STUFEN

TYPE F :
FORO
TROU
HOLE
LOCH

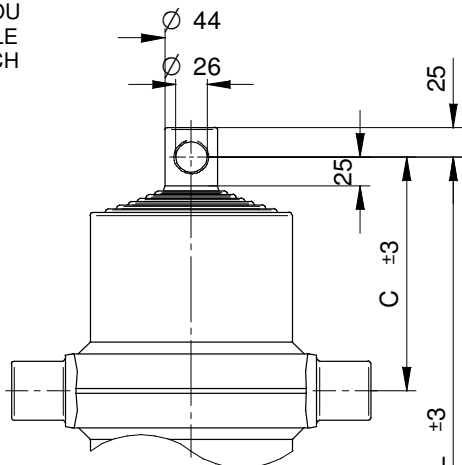


NORME DI SICUREZZA E PRECAUZIONI
DI MONTAGGIO, VEDI Pag. 6
IMPORTANT SAFETY INSTRUCTIONS AND
PRECAUTIONS FOR MOUNTING, Page 6
NORMES DE SECURITE' ET PRECAUTIONS
DE MONTAGE, VOIR Page 7
SICHERHEITSBESTIMMUNGEN UND
VORSICHTSMAßNAHMEN FÜR DEN EINBAU, Page 7

TYPE S :
SFERA
ROTULE
BALL
KUGEL

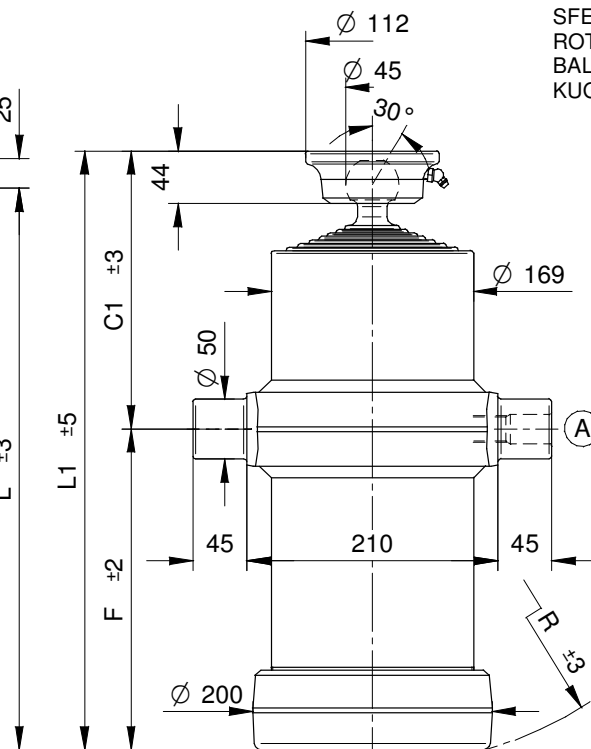


KIT GUARNIZIONI, SEALS KIT, KIT DE JOINTS, DICHTUNGSSATZ: **SGS046-145**

STANDARD



(A) 26100000 3/4 gas

OPTIONAL




CULLA5




SUP050




SUP050-A



26320000 27230000



71780000 1/2 Gas
71560000 3/4 Gas



CH045-2414

PESO TOT. RIBALTABILE 11 Ton. a 180 Bar

TOTAL WEIGHT TIP-UP 11 Ton. 180 Bar

POIDS TOT. BASCULABLE 11 Ton. à 180 Bar

GESAMTGEWICHT ANHÄNGER 11 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO – DRAWING DESSIN – ZEICHNUNG	CORSO – STROKE COURSE – HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm									DIMENSIONI CILINDRO DIMENSIONS VÉRIN CYLINDER DIMENSIONS ZYLINDER ABMESSUNGEN						L.sfilata – L. extension L.expansion – L. stufen	Peso – Kg – Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölnhalt Lt.
			32 TON. 1,1	46 TON. 2,9	61 TON. 5,2	76 TON. 8,1	91 TON. 11,7	107 TON. 16,1	126 TON. 22,4	145 TON. 29,7	165 TON. 38,4	C	C¹	F	L	L¹	R		F	S	
7005	18976	1150		●	●	●	●	●	●	●		196	235	110	306	345	147	240	47	49	9
7006	18977	1360		●	●	●	●	●	●	●		196	235	140	336	375	171	270	51	53	11
7007	18978	1710		●	●	●	●	●	●	●		196	235	190	386	425	214	320	56	58	13
7008	18979	1815		●	●	●	●	●	●	●		196	235	205	401	440	228	335	58	60	14
7009	18980	2060		●	●	●	●	●	●	●		196	235	240	436	475	260	370	65	67	16
7010	18981	2620		●	●	●	●	●	●	●		196	235	320	516	555	336	450	75	77	20
7011	18982	2960		●	●	●	●	●	●	●		196	235	370	566	605	384	500	83	85	23
7012	18983	3450		●	●	●	●	●	●	●		196	235	440	636	675	452	570	92	94	27

PRESSIONE MAX. DI ESERCIZIO 200 BAR - PRESSION MAX. DE SERVICE 200 BAR
WORKING MAX. PRESSURE 200 BAR - MAX. BETRIEBSDRUCK 200 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN