

CILINDRI TELESCOPICI CON 2 SFILATE
TELESCOPIC CYLINDERS WITH 2 EXTENSIONS

VÉRINS TELESCOPIQUES A 2 EXPANSIONS
TELESKOPZYLINDER MIT 2 STUFEN


PESO TOT. RIBALTABILE 3,5 Ton. a 180 Bar

TOTAL WEIGHT TIP-UP 3,5 Ton. 180 Bar

POIDS TOT. BASCULABLE 3,5 Ton. à 180 Bar

GESAMTGEWICHT ANHÄNGER 3,5 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO - DRAWING DESSIN - ZEICHNUNG	CORSO - STROKE COURSE - HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm						L.sfilata - L. extension L.expansion - L. stufen	Peso - Kg - Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt Lt.
			46 TON. 2,9	61 TON. 5,2	76 TON. 8,1	91 TON. 11,7	107 TON. 16,1	L ¹		F	S	
2720	12170	455	●	●				440	300	-	16,9	1,1
2721	12171	525	●	●				475	335	-	17,4	1,3
2722	12172	595	●	●				510	370	-	18,4	1,5
2723	12173	695	●	●				560	420	-	20,4	1,7
2724	12174	795	●	●				610	470	-	21,9	2
2725	12175	895	●	●				660	520	-	23,9	2,2
2726	12176	995	●	●				710	570	-	25,9	2,4

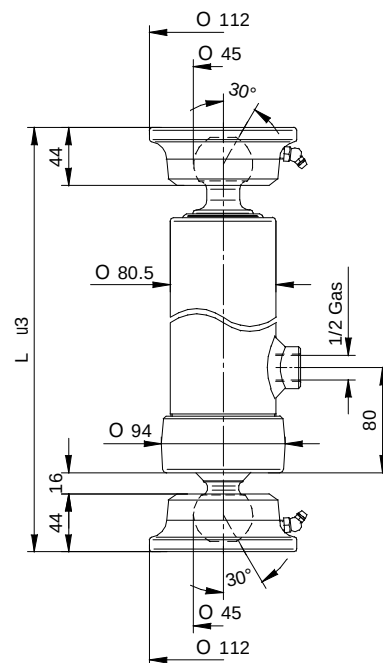

CILINDRI TELESCOPICI CON 2 SFILATE
TELESCOPIC CYLINDERS WITH 2 EXTENSIONS

VÉRINS TELESCOPIQUES A 2 EXPANSIONS
TELESKOPZYLINDER MIT 2 STUFEN


PESO TOT. RIBALTABILE 5,5 Ton. a 180 Bar

TOTAL WEIGHT TIP-UP 5,5 Ton. 180 Bar

POIDS TOT. BASCULABLE 5,5 Ton. à 180 Bar

GESAMTGEWICHT ANHÄNGER 5,5 Ton. 180 Bar

TIPO TYPE TYPE TYP	DISEGNO - DRAWING DESSIN - ZEICHNUNG	CORSO - STROKE COURSE - HUB	Ø SFILATE mm Ø EXPANSIONS mm Ø EXTENSIONS mm Ø STUFEN mm						L.sfilata - L. extension L.expansion - L. stufen	Peso - Kg - Weight		Volume olio Lt. Amount of oil Lt. Volume huile Lt. Ölinhalt Lt.
			46 TON. 2,9	61 TON. 5,2	76 TON. 8,1	91 TON. 11,7	107 TON. 16,1	L ¹		F	S	
3721	12195	495		●	●			486	320	-	22	2
3722	12196	595		●	●			536	370	-	24	2,3
3723	12197	695		●	●			586	420	-	27	2,7
3724	12198	795		●	●			636	470	-	30	3
3725	12199	895		●	●			686	520	-	32	3,5
3726	12200	995		●	●			736	570	-	34	3,8

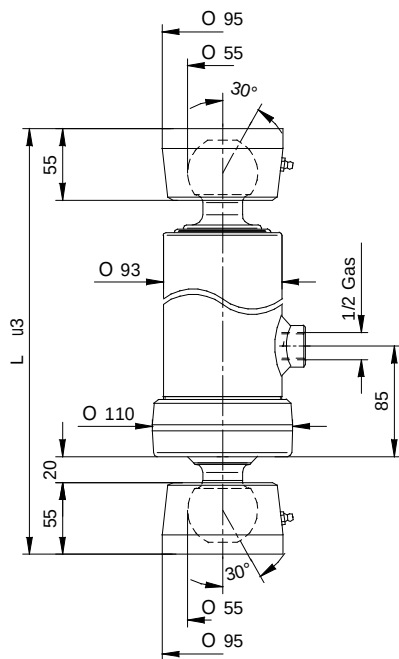

PRESSIONE MAX. DI ESERCIZIO 220 BAR - PRESSION MAX. DE SERVICE 220 BAR
WORKING MAX. PRESSURE 220 BAR - MAX. BETRIEBSDRUCK 220 BAR

CARATTERISTICHE TECNICHE DATE A TITOLO PURAMENTE INDICATIVO E MODIFICABILI SENZA PREAVVISO - THESE TECHNICAL SPECIFICATIONS ARE ONLY APPROXIMATE VALUES AND MAY BE CHANGED WITHOUT ANY PREVIOUS NOTICE
CARACTERISTIQUES TECHNIQUES DONNÉES A TITRE PUREMENT INDICATIF ET MODIFIABLES SANS PREAVIS - DIESE TECHNISCHEN DATEN GELTEN NUR ALS RICHTWERTE UND KÖNNEN OHNE VORANMELDUNG GEÄNDERT WERDEN